

B R O C H U R E


< < < < < <

Vibrating Screen



Anping Web Wire Mesh Co.,Ltd.

Wire Mesh For Vibrating Screen

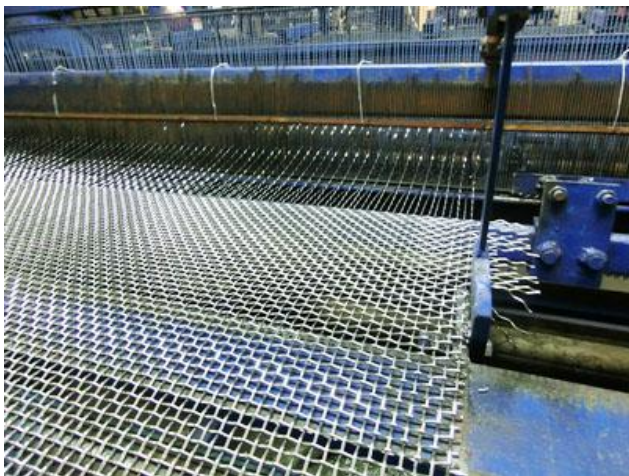

Introduction

Crimped screens are widely used in industries as screen deck for crusher screen, vibrating screen, quarrying screen, mining screen etc.

When choosing the material for manufacturing screen deck, these factors are very important to consider, such as corrosion, abrasion, heat, vibration and weight etc. We weave the screens in stainless steel or high tensile steel.

When manufacturing the crimped screen, two basic designs are produced to maximize your aggregate production. One is the square opening, the other is oblong-shaped openings. Square openings are the most commonly used opening shape in the aggregate industry. Oblong-shaped openings offer two distinct advantages: more open area and greater wear-life, depending on the specific screening application.



Idea for	Screen Size	Features & Benefits
<ul style="list-style-type: none">Crusher screenVibrating screenQuarrying screenMining screen	<ul style="list-style-type: none">20mm opening40mm opening50mm opening	<ul style="list-style-type: none">Abrasion and wear proofRugged and tough designLong service lifeHigh resistance against corrosionGreat stability

Technical Parameters

When ordering, please specify:

1. Weave Type


Plain weave, plain crimped, single crimped, lock crimped, flat top crimped, slot hole crimped

2. Wire Diameter (D)


3. Hole Size (L)

4. Panel Width (PW)


5. Panel Length (PL)

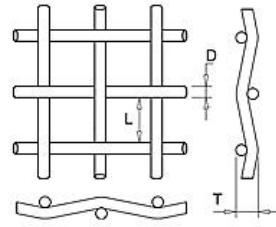


Plain Weave

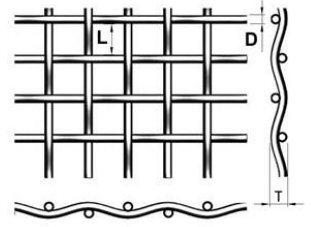

Plain Crimped

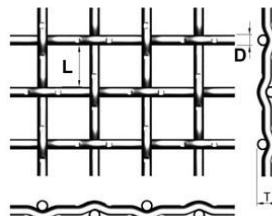

Lock Crimped

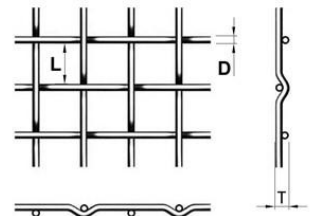

Flat Top Crimped

Crimped Wire Screen

Opening L		Wire D		Open Area	Weight
mm	inch	mm	inch	%	Kgs/m ²
10.00	0.394	2.00	0.079	69.44	4.11
12.00	0.472	3.00	0.118	64.00	7.40
15.00	0.591	2.50	0.098	73.47	4.40
20.00	0.787	3.00	0.118	75.61	4.82
25.00	0.984	4.00	0.157	74.32	6.80
30.00	1.181	3.00	0.118	82.64	3.36
40.00	1.575	5.00	0.197	79.01	6.85
50.00	1.969	4.00	0.157	85.73	3.65

Headquarters

Web Wire Mesh Co.,Ltd.
No.12 Weier Rd.
EZD Industrial Park
Hebei, China
Tel: +86 0318 7568801
Fax: +86 0318 7568802
Website: www.webwovenmesh.com

Branch

Web Wire Mesh Co.,Ltd.-SJZ
NO 2701 CYC
Shijiazhuang City
Hebei, China
Tel: +86 0311 89255081
E-mail: zhao@webwirecloth.com



Anping Web Wire Mesh Co.,Ltd.